


Modular Belt Scales



All these advantages combined in the HB-8234 Series measuring system!

- Extremely user friendly operator interface, including self-prompting instructions and messages.
- Sealed membrane full-function keyboard.
- Multi-function display; including 8 digit 10mm high upper read-out for numeric data, 128 x 64 dots LCD display full alpha-numeric lower read-out messages and instructions. Also 8 LED status indicators for annunciation of alarms, inputs, etc.
- Total password security for protection of calibration constants and rerate (capacity re-program ming) parameters.
- Electrically isolated inputs and outputs. Additional inputs and outputs available with expansion modules.
- Max. 16 dry contact input or NPN open collector transistor input. (option up to 32 D/I)
- Max. 8 NPN open collector transistor output (option up to 16 D/O)
- Panel mount and Wall mount enclosures available.
- User programmable Zero Speed Switch for belt weighers and belt feeders.
- User programmable rerate functions (All variables for reconfiguring scale or feeder capacity or operating parameters).
- Programmable for Master/Slave, Ratio, or Blending Operations.
- Automatic belt deviation monitoring. / Automatic belt slip monitoring.
- User selectable English or Metric units of measurement.
- Remote operation keyboard for systems.
- Printer interface is available.
- Chart recorder interface is available
- Excellent immunity to RFI and EMI.

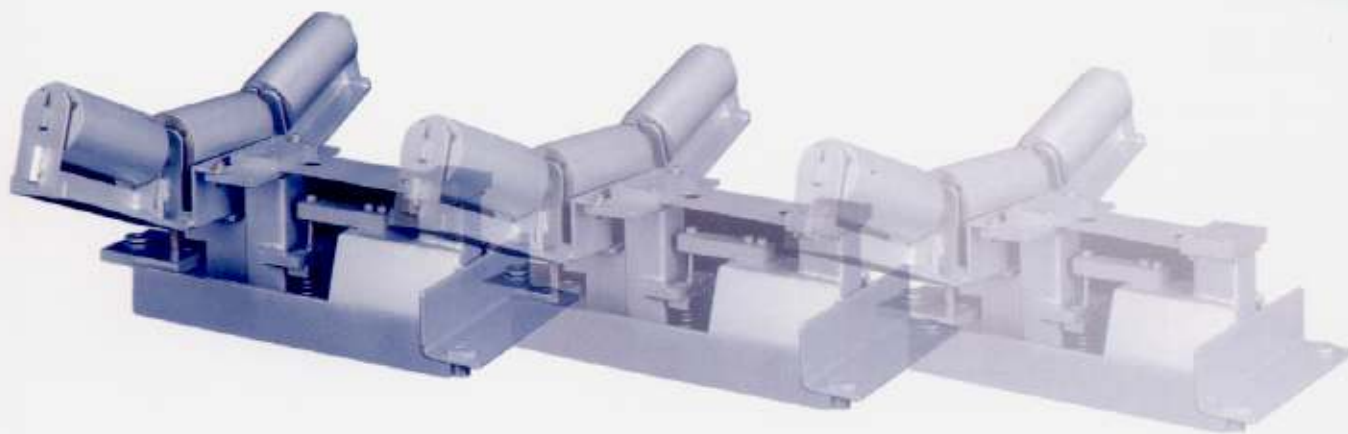

● HB-8234



HOLBRIGHT WEIGHING SYSTEMS CO., LTD.

4F, NO. 31, LANE 21 MIN CHUAN EAST RD. SEC. 6 NEI HU,

TAIPEI, TAIWAN R. O. C.

TEL: 886-2-8792-0788

FAX: 886-2-8791-2380

E-mail: hoblright@ms11.hinet.net