


HB-DSB Series 懸臂式數字傳感器





特點

- 量程0.5~25t
- 高精度OIML C1, C3
- 數字式信號輸出穩定性高，精確度高，傳輸距離無遠弗屆
- 免用砵碼即可完成調校工作
- 傳感器更新不需再次費時調校
- IP68防護等級
- 俱自我診斷測試，故障提示功能
- 俱雙重靈敏保護裝置設計




外形及安裝尺寸mm (inch)

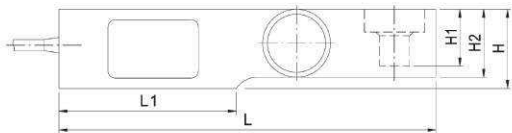

附件外型尺寸

(HB-MT105-MS/SS)



| 單位(mm) | D | B | A | C |
|--------|----------|------------|------------|----------|
| 0.5-3 | 35(1.38) | 44.9(1.77) | 24.9(0.98) | 32(1.36) |
| 5 | 42(1.65) | 56.7(2.23) | 34.7(1.37) | 40(1.57) |
| 10,15 | 57(2.24) | 80.7(3.18) | 66.7(2.63) | 53(2.09) |
| 20,25 | 70(2.76) | 85(3.35) | 67(2.64) | 64(2.52) |

| 單位(mm) | L | L1 | L2 | L3 | L4 | H1 | H2 | H | W | d |
|--------|-----|-----|----|-----|----|----|----|------|----|----|
| 0.5,2 | 203 | 95 | 22 | 98 | 64 | 30 | 37 | 43 | 37 | 13 |
| 2.5 | 203 | 95 | 22 | 98 | 64 | 30 | 37 | 43 | 37 | 15 |
| 3 | 203 | 95 | 22 | 98 | 64 | 25 | 37 | 43 | 37 | 15 |
| 5 | 235 | 110 | 22 | 124 | 66 | 30 | 48 | 52 | 48 | 21 |
| 10,15 | 279 | 133 | 32 | 140 | 82 | 20 | 60 | 67 | 60 | 28 |
| 20,25 | 318 | 153 | 38 | 159 | 89 | 24 | 70 | 82.5 | 70 | 34 |